

# GRAPHTEC

## Isolated/Universal Input, Standalone Multi-Channel Datalogger

# midi LOGGER

## GL840-M / GL840-WV / GL240



### Setting New Heights in Data Recording



- Flexible input system for wide array of applications
- Extended memory capacity using SD memory card
- Maximum sampling interval of up to 10ms

**NEW** Multi-Input Model  
midi LOGGER GL840-M



**NEW** High Voltage Withstand Model  
midi LOGGER GL840-WV



**NEW** 10-Channel Portable Model  
midi LOGGER GL240



[www.graphteccorp.com](http://www.graphteccorp.com)

| Main unit series specifications                              |  |  |
|--|--|--|
| Item   | Description  |  |
| Model number   | GL840-M/GL840-WV   | GL240  |
| Number of analog input channels                              | 20 channels in standard configuration, Expandable up to 200 channels   | 10 channels  |
| Number of analog input terminals                             | Up to 10 terminals (standard config: 1)  | N/A  |
| Type of analog input terminal                                | Multi-input type, Withstand-voltage type   | N/A  |
| Port for digital sensor                                      | 1 port for the sensor/terminal of the GL100  | N/A  |
| External input/output (*1)                                   | Input (*2) Trigger or Sampling (1 channel), Logic/Pulse (4 channels)<br>Output (*3) Alarm (4 channels)   |  |
| Sampling interval  | 10 ms to 1 hour (10ms to 50ms: voltage only) (*4), External signal   |  |
| Time scale of waveform display                               | 1 sec. to 24 hour /division  |  |
| Trigger, Alarm function                                      | Trigger action Start or stop capturing data by the trigger<br>Repeat action Off, On (auto rearmed)<br>Trigger source Start: Off, Measured signal, Alarm, External, Clock, Week or Time<br>Stop: Off, Measured signal, Alarm, External, Clock, Week or Time         |  |
| Pulse input function   | Condition Setting  | Combination: AND / OR<br>Analog signal: Rising (High), Falling (Low), Window-in, Window-out<br>Logic signal: Pattern (combination of each input signal in high or low)<br>Pulse (number of count): Rising (High), Falling (Low), Window-in, Window-out |
|  | Alarm output   | Outputs a signal when alarm condition occurs in the input signal (*5)  |
| Calculation function   | Rotation count (RPM) mode  | Counts the number of pulses per sampling interval and converts to rpm (rotations per minute), Number of pulses for one rotation can be set to 50, 500, 5000, 50k, 500k, 5M, 50M, 500M rpm/F.S. (rpm./Full Scale)                                       |
|  | Accumulating count mode  | Accumulates the number of pulses from the start of measurement 50, 500, 5000, 50k, 500k, 5M, 50M, 500M C/F.S. (Counts/Full Scale)  |
|  | Instant count mode   | Counts the number of pulses per sampling interval 50, 500, 5000, 50k, 500k, 5M, 50M, 500M C/F.S. (Counts/Full Scale)   |
| Search function  | Between channels   | Addition, Subtraction, Multiplication, and Division for analog input   |
|  | Statistical  | Select two calculations from Average, Peak, Maximum, Minimum, RMS  |
| Interface to PC  | Search for analog signal levels, values of logic or pulse or alarm point in captured data  |  |
|  | Ethernet, USB 2.0 (Hi-speed)   | USB 2.0 (Hi-speed)   |
| Storage device   | Internal   | Built-in 4GB Flash Memory (*6)   |
|  | External   | One SD card slot (Supports SDHC memory card, up to 32GB) (*7)  |
| Capturing mode   | Saved contents   | Captured data, Setting conditions, Screen copy   |
|  | Mode: Normal, Ring, Relay<br>Ring: Saves most recent data (Number of capturing data: 1000 to 2000000 points) (*8)<br>Relay: Saves data to multiple files without losing data until data capturing is stopped.  |  |
| Replay data (in GBD or CSV format)                           | Replays captured data that was saved in the GL840  |  |
| Scaling (Engineering unit) function                          | Measured value can be converted to specified engineering unit<br>• Analog voltage: Converts using four reference points (gain, offset)<br>• Temperature: Converts using two reference points (offset)<br>• Pulse count: Converts using two reference points (gain) |  |
| Action during data capture                                   | • Displaying past data (using dual display mode (Current + Past data))<br>• Hot-swapping the SD memory card<br>• Saving data in between cursors  |  |
| Display (LCD)  | Size   | 7-inch color TFT (WVGA: 800 x 480 dots) / 4.3-inch color TFT (WQVGA: 480 x 272 dots)   |
|  | Language   | English, French, German, Chinese, Korean, Russian, Spanish, Japanese   |
| Operating environment  | Waveform in Y-T with digital values, Waveform only, Digital value, Digital values and statistics values, Bar chart (in GL840)  |  |
|  | 0 to 45 °C, 5 to 85 % RH (non condensed)<br>(When operating with battery pack 0 to 40 °C, charging battery 15 to 35 °C)  |  |
| Power source   | AC adapter   | 100 to 240 V AC, 50/60 Hz (1 pc of adapter is attached as standard accessory)  |
|  | DC power   | 8.5 to 24 V DC (DC drive cable (option B-514) is required)   |
| Power consumption (*10)                                      | Max. 38 VA   | Max. 36 VA   |
| External dimensions (W x D x H in mm, Excluding projections) | GL840-M: Approx. 240 x 158 x 52.5  | Approx. 188 x 117 x 42   |
|  | GL840-WV: Approx. 240 x 166 x 52.5   |  |
| Weight (*11)   | GL840-M: Approx. 1010 g  | Approx. 500 g  |
|  | GL840-WV: Approx. 1035 g   |  |

| Software specifications for PC |   |  |
|--------------------------------|---|--|
| Item                           | Description   |  |
| Model name                     | GL100_240_840-APS   |  |
| Supported OS                   | Windows 10, 8.1, 8, 7, Vista (32/64-bit edition)  |  |
| Supported device               | GL840 (USB, Ethernet), GL240 (USB), GL100 (USB)   |  |
| Functions                      | Control the GL series, Real-time data capture, Replay data, and Data format conversion  |  |
| Supported units & channels     | Up to 1000 channels total, Up to 4 groups (number of units is limited by device)  |  |
| Settings control               | Input condition, Capturing condition, Trigger/Alarm condition, Report, etc.   |  |
| Capturing data                 | Saved to PC   | Saves captured data in real time (in GBD binary or CSV format) |
|                                | Saved to GL unit  | Saves to the SD memory card (in GBD binary or CSV format)      |
| Displayed information          | Y-T waveform, Digital values, Report, X-Y graph (specified period of data, data replay only),<br>Two display for the current and past, Statistical calculation, and Integrated value in a bar chart |  |
| File operation                 | Converting data format to CSV from GBD binary, merge multiple data files in the time axis or as an additional channel   |  |
| Warning function               | Send e-mail to the specified address when the alarms occur  |  |
| Statistical calculation        | Maximum, Minimum, and Average during data capturing   |  |
| Report function                | Creates the daily or monthly report automatically   |  |

\*1. Input/Output cable for GL (option B-513) is required to connect the signal.  
\*2. Input signal: • Voltage range: up to 24V (common ground) • Signal type: Voltage, Open collector, Contact (relay)  
• Threshold: approx + 2.5 V (hysteresis: approx 0.5V (2.5V to 3V))  
\*3. Output signal: Open collector (pull-up to 5V by 10kΩ resistor)  
• Maximum rating of the output transistor:  
Voltage: 30V, Current: 0.5A, Collector dissipation: 0.2W  
\*4. Minimum interval varies by number of channels used.  
\*5. Output port can be specified in each input channel.  
\*6. The built-in Flash memory is available for units with serial numbers C604xxxxx or later.  
Please refer to the website for more information.  
\*7. SD memory card cannot be used on the second slot while the wireless LAN unit (option B-568) is used.  
\*8. Size of the capture data will be limited to 1/3 available memory.  
\*9. Display mode is switched every time the dedicated key is pressed. In magnified digital value mode, the displayed channel number can be specified. In the waveform display mode, the changing of the time scale will be effective from the point of the next displayed data.  
\*10. Rating under maximum power consumption using the AC adapter, with LCD display on, and battery pack(s) being charged.  
\*11. Excludes AC adapter and battery pack.  
\*12. The terminal "b" for using the RTD is connected each other across all channels.

• Due to the possibility of equipment or PC failure, the data files on the instrument will not be guaranteed to be held on the memory. Please make a backup of data whenever possible to avoid data loss.  
• Brand names and product names listed in this brochure are the trademarks or registered trademarks of their respective owners.  
• Items mentioned are subject to change without notice. For more information about product, please check the web site or contact your local representative.

**⚠ For using equipment in correctly and safely** • Before using it, please read the user manual and then please use it properly in accordance with the description.  
• To avoid malfunction or an electric shock by current leakage or voltage, please ensure a ground connection and use according to the specification.

**GRAPHTEC**  
Graphtec Corporation

503-10 Shinano-cho, Totsuka-ku, Yokohama 244-8503, Japan  
Tel : +81-45-825-6250 Fax : +81-45-825-6396  
Email : [webinfo@graphtec.co.jp](mailto:webinfo@graphtec.co.jp)

Website <http://www.graphteccorp.com>



KE10216 GR Vol.4P

# midi LOGGER

## GL840 series & GL240



GL840 series

GL240

### Setting New Industry Standards for It's Class

#### Accommodates a wide variety of measurements

##### Multifunction analog input ports

Contains a highly isolated input mechanism which ensures that signals are not corrupted by noise from other channels. The GL840/240's inputs are suitable for combined measurements from voltage, temperature, humidity, logic, and pulse signals.


##### 4 channels of Logic/Pulse inputs

Supports 4-channel logic or pulse signal inputs. Pulse mode allows cumulative, instant, or rotational values for industrial measurement capability with speed and flow.

|                 |   |  |   |
|-----------------|---|--|---|
| <b>Voltage</b>  | Ranges from 20mV to 100V  | <b>Pulse</b>   | 4 channels*<br>Accumulating, Instant or RPM |
| <b>Temp</b>     | Thermocouple type: R, S, B, K, E, T, J, N, W<br>RTD types (for GL840 only): Pt100, Pt1000, JPt100 | <b>Logic</b>   | 4 channels*                                 |
| <b>Humidity</b> | 0 to 100%RH - using optional sensor (B-530)   | * Requires optional input/output cable (B-513).<br>Select either Pulse or Logic input. |   |

#### Large easy-to-read 7-inch wide color LCD(4.3-inch in the GL240)


Carries a clear 7-inch wide TFT color LCD screen (WVGA: 800 x 480 dots) for the GL840, and 4.3-inch wide LCD screen (WQVGA: 480 x 272 dots) for the GL240. Monitoring data can be displayed in waveform or digital form. Parameter settings can be displayed on the screen.



Waveform display (Analog + Digital)



Digital display



Dual display (Current + Past)



Bar chart

#### Useful functions

##### Displays the data by a bar chart

The integrated data that is measured by the digital sensors can be displayed by a bar chart in the GL840 series. Multiple bar chart types are available. Data can also be displayed as a line chart when the GS-TH (Temp/Humidity), GS-DPA-AC with GS-ACxxx (AC current/power) or GS-LXUV (Illuminance/UV) digital sensor is used to the GL840. \* Firmware ver.1.10 or later.

##### Alarm output function

Alarm signals can be placed using the four channel alarm output ports based on set conditions for each channel. \* Input/output cable (B-513 option) is required to connect the alarm output ports to external buzzer/light mechanism.

##### USB drive mode

USB drive mode function enables data to be transferred to the PC from GL840/GL240 by drag & drop feature.

#### Maximum sampling interval of up to 10ms

Provides faster sampling rates for voltage measurements. Up to 10ms sampling speed is achievable when limiting the number of channels in use.

| Model | Sampling interval<br>Number of channel | 10ms        | 20ms      | 50ms | 100ms | 200ms | 500ms     | 1s        | 2s        |           |
|-------|--|-------------|-----------|------|-------|-------|-----------|-----------|-----------|-----------|
|       |  | GL840       | Measuring | Yes  | Yes   | Yes   | Yes       | Yes       | Yes       | Yes       |
| GL240 | Measuring                              | Voltage     | Yes       | Yes  | Yes   | Yes   | Yes(10ch) | Yes(10ch) | Yes(10ch) | Yes(10ch) |
|       |  | Temperature | N/A       | N/A  | N/A   | Yes   | Yes(10ch) | Yes(10ch) | Yes(10ch) | Yes(10ch) |

\* This chart is applicable when the captured data is saved in the GBD binary file format. Limited sampling speed is available when digital sensors and GL100-WL are used as a remote monitoring device.

#### Built-in 4GB Flash memory with SD card support

The new GL series enables reliable long term measurement with its built-in 4GB flash memory and SD card slot for external storage devices. The SD card slot supports an SDHC memory card of up to 32GB.

**Capturing time\*** (When all 20 or 10 analog channels are being used with Logic/Pulse inputs turned off.)

| Model        | Sampling   | 10ms    | 50ms    | 100ms    | 200ms    | 500ms    | 1s       | 10s      |
|--------------|------------|---------|---------|----------|----------|----------|----------|----------|
| GL840 (20ch) | GBD format | 31 days | 77 days | 95 days  | 108 days | 270 days | over 365 | over 365 |
|              | CSV format | 3 days  | 11 days | 16 days  | 21 days  | 54 days  | 109 days | over 365 |
| GL240 (10ch) | GBD format | 41 days | 88 days | 103 days | 207 days | over 365 | over 365 | over 365 |
|              | CSV format | 3 days  | 12 days | 18 days  | 36 days  | 91 days  | 182 days | over 365 |

\* Figures are approximate. File size of captured data is 2GB in GBD or CSV file format on this chart. Sampling interval is limited by the number of channels in use. (10ms: 1ch, 50ms: 5ch, 100ms: 10ch) Limited sampling speed is available when digital sensors and GL100-WL are used as a remote monitoring device.

##### Ring capture function

The most recent data is saved when the memory is configured in ring memory mode. (Number of capturing data is 1000 to 2000000 points)

##### Relay capture function

Data is continuously saved to multiple files up to 2GB without losing any data until capturing is stopped when the memory is configured in the relay mode.

##### Hot-swapping the SD memory card

SD card can be replaced during data capturing. \* When the wireless sensor (GL100-WL) is connected, the sample interval among 10, 20, and 50ms cannot be replaced during recording.

##### Navigation function

Simple to use navigation screen allows setting operation for measurement and wireless LAN adapter in GL840.

##### 3 Types of Power Source

Choose from AC power supply(AC power adapter), DC supply\* or the rechargeable battery pack.\* \* DC power drive cable (B-514) and battery pack (B-569) are optional accessories.

##### Networking features

**Web & FTP server function**  
GL840/GL240 can be controlled externally via a network on the WEB browser, which also supports monitoring and transfer of signals and captured data.

**FTP client function**  
Captured data is periodically transferred to the FTP server for backup.

**NTP client function**  
The clock on the GL840/GL240 is periodically synchronized with the NTP server. \* The GL840/GL240 needs to be connected to a LAN environment using the available Ethernet ports.

### GL840 expands to two models for application specific use

#### Multi-Input Model midi LOGGER GL840-M



Suitable for temperature measurement with multiple channels.

#### High Voltage Withstand Model midi LOGGER GL840-WV



Suitable for stacked high voltage battery application, or high-precision temperature measurement.

| Withstand voltage & Accuracy |                                | Multi-input type (B-564)                      | Withstand-voltage type (B-565) |
|------------------------------|--------------------------------|---|--------------------------------|
| Voltage                      | Input voltage range            | 20 mV to 100 V                                | 20 mV to 100 V                 |
|                              | Max. voltage (Input - GND)     | 60 Vp-p                                       | 300 Vp-p                       |
| Temp                         | Thermocouple                   | R, S, B, K, E, T, J, N, W (WR5-26)            |                                |
|                              | RTD (Resistance Temp Detector) | Pt100 (IEC751), Pt1000 (IEC751), JPt100 (JIS) |                                |
| Accuracy                     | Voltage                        | ± 0.1% of F.S.                                |                                |
|                              | Temperature*                   | ± 1.55 °C                                     |                                |

\* Accuracy rating for K-type thermocouple at 100°C includes reference junction compensation. Accuracy varies by temperature levels and thermocouple types.

#### Expandable up to 200 channels

Standard configuration has 20 analog input channels. It is expandable to 200 channels by adding the optional 20 channel extension terminal base unit (B-566) and input terminal units (B-564 or B-565).

The following shows how a standard configuration is expanded to a 40 channel configuration.

- Terminal unit is removed from the main body of the GL840.
- Extension terminal base unit (B-566) connects to the GL840 using the external cable (B-567).
- Terminal unit snaps onto the extension terminal base unit (B-566).
- The combined extension terminal base set (B-566) and additional input terminals (B-564 or -565) are daisy chained together.

#### Configuration for additional channels

| Number of channels                 | 20 channels | 40 channels | 100 channels | 200 channels |
|------------------------------------|-------------|-------------|--------------|--------------|
| GL840 unit (GL840-M or GL840-WV)   | 1 set       | 1 set       | 1 set        | 1 set        |
| Connection cable (B-567-05 or -20) | N/A         | 1 pc        | 1 pc         | 1 pc         |
| Terminal base (B-566)              | N/A         | 2 sets      | 5 sets       | 10 sets      |
| Input terminal (B-564 or B-565)    | N/A         | 1 set       | 4 sets       | 9 sets       |

\* Input terminal blocks for the B-564 and B-565 can be mixed together for combined configurations. However, the maximum voltage and accuracy rating for the setup will be limited to the rating of the B-564.

##### Offers longer cable for the input terminals

Input terminal blocks can be connected directly (in daisy chain), or using the B-565 cable(s). This allows the input terminals to be placed in separate locations according to the need of the application. The input terminal and the GL840 main body can be extended by using an extended connection cable.

\* If the signal is affected by noise, it may be required to use a slower sampling.



### High performance software with useful functions for the PC (GL100\_240\_840-APS)

##### Supports GL840, GL240, GL100

Up to 10 units of GL840, GL240 and GL100 can be connected to 1 PC simultaneously. Up to 1000 channels are supported.

##### Controls settings for GL840, GL240, GL100

**Various measurement screen**  
Displays data in Y-T waveform, digital monitoring, statistical calculation result, bar chart\*. \* Software ver.1.10 or later. The direct-Excel function enables captured data to be written directly to an Excel file.

##### File operation

Data captured in multiple files can be merged into a single file. Using the combine function, data can be imported as a new channel overlaying on top of each other. The bind function connects the data in a time axis. When using the relay capture mode, the bind feature will append multiple files together into one large, continuous file.

##### Useful functions

###### Scheduling function

Create a schedule for your monitoring to start and stop at selected time, and set an automatic measurement schedule.

###### Group function


Multiple units can be managed, such as controlling start or stop simultaneously. Data captured by each unit is saved in a single file.

##### Data format conversion

Converts the GBD (Graphtec Binary Data) format to CSV format. The file size is reduced using the compression function saving a value at particular time point of a specified interval. Or, it will save the average, maximum, or minimum values from the specified time interval as the highlighted values.

#### Three types of input systems enable measurement of various signals

Along with the basic analog signal, Logic/Pulse, and digital sensors can be all connected to monitor a variety of measurements.

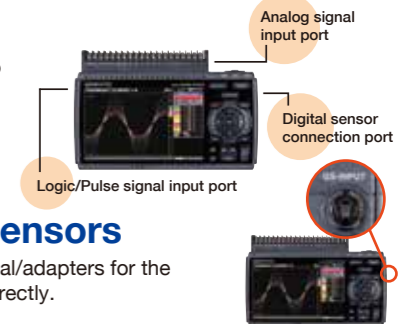

#### Support digital sensors


Digital sensors and input terminal/adapters for the GL100 connect to the GL840 directly.




\* Supports up to two AC current sensors.  
\*\* Allows only one extension cable per port.

#### Dual port adapter connects up to two sensors for simultaneous interface

- Temp/Humidity & Illuminance/UV
- Temp/Humidity & Carbon Dioxide
- Illuminance/UV & Carbon Dioxide

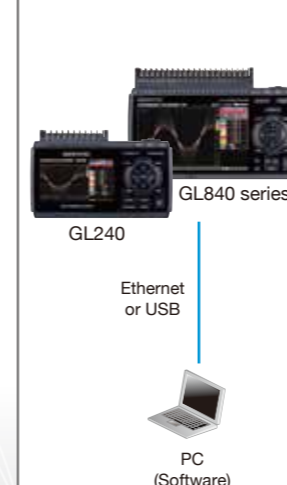

Schedule table is able to create easily using mouse.



Multiple units